


Distribution Board



Type:	MG-M18
[Ue] rated operational voltage:	415VAC
Rated current:	100A
Rated frequency:	50/60Hz
No.of ways:	18
Degree of protection:	IP54;IP65
Installation:	Out door/Indoor, Flush mounted
Material:	Metal
Board Dimension:	620x430x120 mm
Enclosure color:	Light Gray
Standard:	IEC60947-1 IEC60947-2
Incoming Options:	Switch-Isolator,RCCB, Direct Connection
Feed:	Top & bottom
Terminals Capacity:	Switch-Isolator:25mm ² RCCB:25mm ²

Outline Dimension

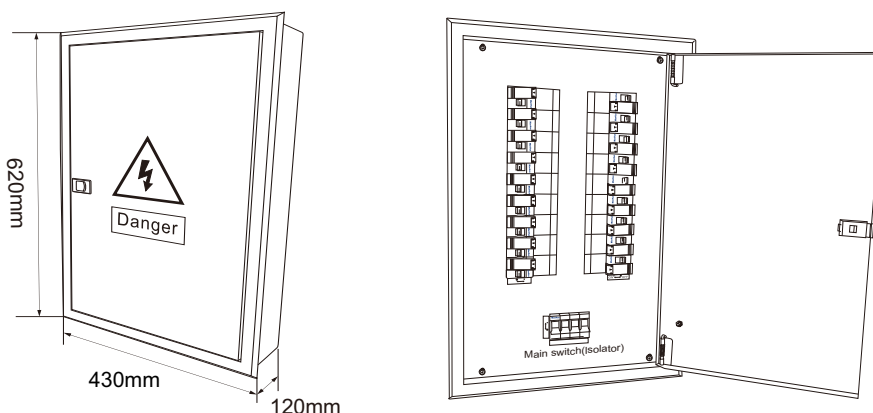

Main components

- 1.Isolator switch,MHX-100,100A,415VAC(1 Piece)
- 2.RCCB,MK3L 10A,100mA (3 Pieces)
- 3.RCCB,MK3L,16A,30mA(3 Pieces)
- 4.RCCB,MK3L,16A,100mA (2 Pieces)
- 5.RCCB,MK3L,20 A, 30mA(8 Pieces)
- 6.RCCB,MK3L,32A,30mA(2 Pieces)

Product feature

- Metal enclosures
- Flush or surface mounting
- Indoor /outdoor use
- Top and bottom feed
- Aluminum support rail for easy placing of outgoing MCB
- Solutions with tailor made distribution boards to meet customer requirements.
- Protection against the indirect and direct contact electricity.
- Protection against the earth leakage by the insulation fault of equipments.
- Protection again the human electricity contacts or electricity net current leakage.
- More than 100 combinations.