


Distribution Board



Type:	MG-M407C
[Ue] rated operational voltage:	440VAC
Breaking capacity:	18kA
Rated current:	100A
Rated frequency:	50/60Hz
Protection type:	overload protection, short-circuit protection
Rated impulse withstand voltage:	6kV
Degree of protection:	IP54
Gland Plates:	Removable gland plates top and bottom
Installation:	Out door, wall mounted
Material:	Steel
Board Dimension:	400x400x140 mm
Main components:	1.MCCB, Single Pole, 100A (3 Pieces). 2.Phase and neutral bars (1 Piece)
Enclosure color:	Light Gray
Standard:	IEC60947-1 IEC60947-2

Outline Dimension

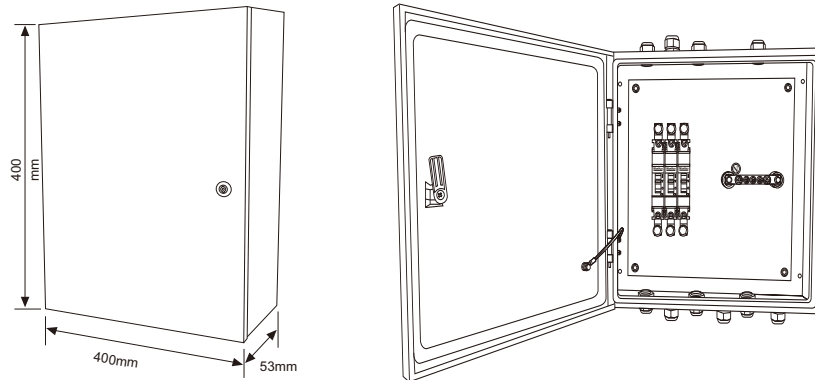

Product feature

- Flush and surface mounting
- Outdoor use
- Top and bottom feed
- With Removable gland plates top and bottom
- With copper connection kits for all incoming options
- Solutions with tailor made distribution boards to meet customer requirements other than standards ones.
- More than 100 combinations.
- Generous wiring space. Easy fit of incomer devices,

Ordering detail

Rated current	Type NO.	Dimension
100A	MG-M407C-100	400X400X140mm
160A	MG-M407C-160	400X400X140mm
250A	MG-M407C-250	400X400X140mm

Note* It could be customized by request.